

### **Overview**

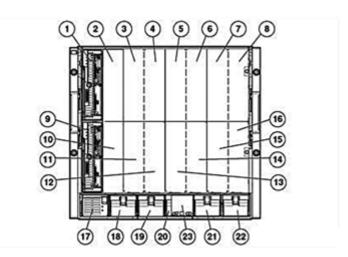

### HP BladeSystem c7000 Enclosure - Front View

- 1. Device Bay 1
- 2. Device Bay 2
- 3. Device Bay 3
- 4. Device Bay 4
- 5. Device Bay 5
- 6. Device Bay 6
- 7. Device Bay 7
- 8. Device Bay 8
- 9. Device Bay 9
- 10. Device Bay 9
- 11. Device Bay 11
- 12. Device Bay 12
- 13. Device Bay 13
- 14. Device Bay 14
- 15. Device Bay 15
- 16. Device Bay 16
- 17. Power Supply Bay 1
- 18. Power Supply Bay 2
- 19. Power Supply Bay 3
- 20. Power Supply Bay 4
- 21. Power Supply Bay 5
- 22. Power Supply Bay 6
- 23. Insight Display

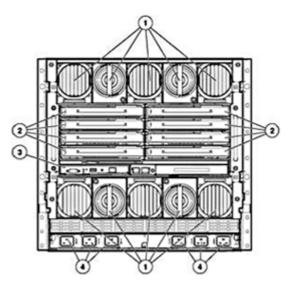

### HP BladeSystem c7000 Enclosure - Rear View

- 1. Active Cool 200 Fans & fan bays
- 2. Interconnect Bays
- 3. BladeSystem Onboard Administrator
- 4. Power Inputs (single phase model shown)



### Overview

### **What's New**

- Support for HP 2650W Platinum Hot Plug Power Supply
- HP BladeSystem c7000 Platinum Enclosure
  - O Increased mid-plane bandwidth
  - Intelligent Infrastructure
    - 2400W or 2650W Platinum Hot Plug Power Supply (80 Plus certified)
    - Intelligent Power Module for Power Discovery Services
    - Location Discovery Services
- Support for HP Insight Control 7.2 and higher releases

**NOTE:** HP BladeSystem c7000 Platinum enclosures are compatible with existing c-Class infrastructures. HP c-Class enclosures are backwards compatible. For more information on interconnects please go to c-Class Interconnects.

### At A Glance

This document covers the HP BladeSystem c7000 Enclosure. For more information on HP ProLiant Server Blades and HP BladeSystem c-Class Interconnect Components please see the following QuickSpecs:

HP BladeSystem c-Class Server Blades:

http://h18000.www1.hp.com/products/quickspecs/north\_america/12534.html

HP BladeSystem c3000 Enclosure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12790\_na/12790\_na.html

HP BladeSystem solutions start with a BladeSystem c7000 Enclosure, optional c7000 hot-plug power supplies, HP Active Cool Fans, and an optional redundant BladeSystem Onboard Administrator module. Once the enclosure has been selected, the following components can be added: networking interconnect modules, HP ProLiant and Integrity Server Blades, and Insight Control management software. Reference the QuickSpecs listed above.

- Warranty This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Additional support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements.
  - O Enclosure: Three-year parts and labor, on-site limited global warranty. Certain restrictions and exclusions apply
  - O Enclosure options: Fans, Power Supplies, BladeSystem Onboard Administrator, 1 Year parts only or enclosure warranty
  - O HP BladeSystem Interconnects: 1 Year parts and labor, on-site regardless of the warranty period for the system in which they are installed
  - HP Storage Fibre Channel switches have a maximum warranty period of one (1) year regardless of the warranty period for the system in which they are installed
  - Hard drives have either a one year or three year warranty; refer to specific hard drive QuickSpecs for details.

For additional information please visit: http://www.hp.com/go/bladesystem



### Models

HP BladeSystem c-Class Server Blade Enclosures

HP BLc7000 Platinum Enclosure with 1 Phase 6 Power Supplies 10 Fans ROHS 16 Insight Control Licenses	681842-B21
HP BLc7000 Platinum Enclosure w/ 1 Phase 2 Power Supplies 4 Fans ROHS Trial Insight Control License	681840-B21
HP BLc7000 Enclosure with 1 Phase 6 Power Supply 10 Fan ROHS ICE License	507015-B21
HP BLc7000 Enclosure with 3 Phase 6 Power Supply 10 Fan ROHS ICE License	507017-B21
HP BLc7000 Enclosure with 1 Phase 2 Power Supply 4 Fan ROHS ICE License	507014-B21
HP BLc7000 Platinum Encl/S-Buy with 2 OA 6 AC Pwr Sppl 10 Fans ROHS 16 IC Lic 2 VC Flex-10/10D	714683-S21
HP BLc7000 Platinum Encl/S-Buy with 2 OA 6 AC Pwr Sppl 10 Fans ROHS 16 C Lic 2 VC FlexFabric	714684-S21

**NOTE:** All c7000 BTO enclosures will ship with 15 server blanks. CTO enclosures will ship with the required number of server blanks.

**NOTE:** c7000 Platinum enclosure (PNs 681840-B21 and 681842-B21) comes standard with increased mid-plane bandwidth, intelligent infrastructure (2400W Platinum Hot Plug Power Supply's, Intelligent Power Module for Power Discovery Services, and Location Discovery Services), and a BladeSystem Onboard Administrator with KVM. **NOTE:** c7000 enclosure (PNs 5070xx-B21) come as standard with the HP 2400W Gold Power Supply and BladeSystem Onboard Administrator with KVM. HP 2650W Platinum Power Supplies are optional via CTO and located in the Configuration Information Factory Integration Process section below.



### HP BladeSystem c-Class Overview

### HP BladeSystem c-Class c7000 Enclosure

A BladeSystem c7000 enclosure holds up to 16 server and/or storage blades plus redundant network and storage switches. It includes a shared, multi-terabit high-speed mid-plane for wire-once connectivity of server blades to network and shared storage. Power is delivered through a pooled power backplane that ensures the full capacity of the redundant hot-plug power supplies is available to all blades.

Each c7000 enclosure is built with the following functions:

- Up to 16 half-height and/or up to 8 full-height server blades and/or storage blades per enclosure.
- Up to 4 different interconnect fabrics (Ethernet, FC, IB, iSCSI, SAS, etc.) supported simultaneously within the enclosure.
- Choice of a single-phase, three-phase or a -48V DC power subsystem for flexibility in connecting to datacenter power.
- HP Thermal Logic technology for lower power consumption and airflow.
- Four (4) or Ten (10) Active Cool 200 fans as standard. For redundancy and improved power consumption and acoustics; additional Active Cool 200 Fan kits can be added for a maximum of 10 fans.
- Redundant hot-plug cooling, redundant hot-plug power supplies, redundant connections, redundant interconnect modules, optional redundant BladeSystem Onboard Administrator management modules.
- Lowest cost of ownership.
- Full AC redundancy with no power zones.

An BladeSystem Onboard Administrator management module is built in to the enclosure with the following functions:

- Robust, multiple enclosure setup and control.
- Reports asset and inventory information for the devices in the enclosure.
- Reports thermal and power information, including real-time actual power usage per server and per enclosure.
- Front-mounted Insight Display for easy management within the datacenter.
- Integrated access to all server blade iLOs from a single cable.
- Provides integrated access to interconnect bay device management ports from the single BladeSystem Onboard Administrator cable.
- Single sign-on capability for all devices in the enclosure
- Role-based security locally and/or with LDAP directory services.
- Provides a wizard-based initial setup process for easy configuration.

A BladeSystem c7000 enclosure provides the following benefits:

- With local and remote hardware management integrated across the solution, one full enclosure can be managed as easily as one server.
- Scalable: Management and network interconnects extend scalability beyond a single enclosure, allowing resources to be pooled and shared across multiple enclosures.
- Investment protection: Accommodates multiple server and network designs in one enclosure.
- Lower costs per server, in comparison to rack-mounted servers
- Lower power consumption, in comparison to rack-mounted servers.
- Lower airflow requirements, in comparison to rack-mounted servers



### HP BladeSystem c-Class Overview

### **HP c3000 Enclosure**

For customers that need a smaller system the c3000 is the perfect solution. Supporting up to 8 blades and 4 interconnects the c3000 enclosure provides an ideal solution for Small and Medium businesses and remote sites for more information refer to the c3000 QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12790\_na/12790\_na.html

### HP ProLiant & Integrity Server Blades

Delivering best-in-class performance, choice and reliability on AMD Opteron™, Intel® Xeon® and Intel® Itanium® processors for Windows, Linux, Solaris, OpenVMS or HP-UX based servers; the HP portfolio of server blades supports a variety of application requirements for scale-out architectures. HP offers one-, two-, four-, or eight processor server blades, with the widest range of performance, and form factors. For more information please see:

http://h18000.www1.hp.com/products/quickspecs/north\_america/12534.html

**NOTE:** The length of HP ProLiant Gen8 server blades is longer than previous generations, and these server blades protrude slightly from the edge of the enclosure.

### HP D2200sb Storage Blade

Do you need a direct attached or shared storage solution within your BladeSystem enclosure?

### **Direct attached storage**

The D2220sb Storage Blade delivers direct attached storage for c-Class Gen8 blade servers, with support for up to twelve hot plug small form factor (SFF) SAS or SATA Midline hard disk drives or SAS/SATA SSDs. The enclosure backplane provides a PCI Express connection to the adjacent c-Class server blade and enables high performance storage access without any additional cables. The D2220sb Storage Blade features an onboard Smart Array P420i controller with 2GB flash-backed write cache, for increased performance and data protection. Up to eight D2220sb storage devices can be supported off a single BladeSystem c7000 enclosure for up to 115.2 TB of capacity.

### Two ways to create shared storage with the D2220sbs

Use HP StoreVirtual VSA software to turn the D2220sb into an iSCSI SAN for use by all servers in the enclosure and any server on the network. HP VSA software is installed in a virtual machine on a VMware ESX host server adjacent to the D2220sb. HP StoreVirtual VSA turns the D2220sb into a scalable and robust iSCSI SAN, featuring storage clustering for scalability, Network RAID for storage failover, thin provisioning, snapshots, remote replication, and cloning. Expand capacity within the same enclosure or to other BladeSystem enclosures by adding additional D2220sb Storage Blades and HP VSA licenses. A cost effective bundle of the D2220sb Storage Blade and a HP StoreVirtual VSA license makes purchasing convenient. If storage needs increase, add HP P4300 or P4500 systems externally and manage everything via a single pane of glass.

The HP StoreEasy 3830 Gateway Storage Blade is a flexible storage server solution for BladeSystem environments. Combine the StoreEasy 3830with the D2220sb Storage Blade to enable file serving and iSCSI shared storage inside the BladeSystem enclosure.

**NOTE:** c7000 requires 10 fans, storage blade is not supported with 8 fan configuration.

For more information, please visit:

http://h18004.www1.hp.com/products/quickspecs/14507\_na/14507\_na.html



### HP BladeSystem c-Class Overview

### **HP Ultrium Tape Blades**

The HP SB1760c is an LTO-4 Ultrium, 1.6 TB capacity on a single cartridge (2:1 compression), 576 GB/hr performance (2:1 compression), 128 MB buffer size, WORM capability, AES 256-bit hardware data encryption capability.

Tape blades are ideal for HP BladeSystem c-Class customers who need a data protection solution but are not connected into a Storage Area Network (SAN). They provide direct attach data protection for the adjacent server and network backup protection for all other data within the enclosure. The HP tape blades are the industry's first bladed tape drives and are developed exclusively for the BladeSystem c-Class enclosures.

For more information, please visit:

http://h18000.www1.hp.com/products/quickspecs/12729\_na/12729\_na.html

### HP Network Storage Servers

HP X1800sb Network Storage Blade

HP X1800sb Network Storage Blade is a flexible storage server solution for BladeSystem environments. Combine the X1800sb with the D2200sb Storage Blade to enable file serving and iSCSI shared storage inside the BladeSystem enclosure. The flexibility of the X1800sb extends to external storage as well. The X1800sb can also be used as a low cost SAN gateway to provide consolidated file-serving access to FC, SAS, or iSCSI SANs.

**NOTE:** See the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/12786\_na/12786\_na.html

HP X3800sb Network Storage Gateway

The X3800sb Network Storage Gateway Blade is used to access FC, SAS, or iSCSI SAN storage, translating file data from the server into blocks for storage to provide consolidated file, print, and management hosting services in a cluster-able package.

Built on the HP ProLiant BL460c Server Blade, the HP X3800sb Network Storage Gateway Blade is a ready to deploy SAN gateway solution, with Microsoft Storage Server 2008, Enterprise x64 Edition pre-installed. The HP Rapid Start-up Wizard accelerates new deployments by walking you through basic system settings step-by-step. The X3800sb also includes a Microsoft Cluster Server (MSCS) license and Microsoft iSCSI Software Target.

**NOTE:** See the QuickSpecs for Technical Specifications and additional information: http://h18006.www1.hp.com/products/quickspecs/13334\_na/13334\_na.html

### **Dynamic Power Capping**

HP Dynamic Power Capping is the industry's first and only power capping solution that lets you reclaim trapped power and cooling capacity without putting electrical infrastructure or server performance at risk. The enclosure Dynamic Power Cap will be shared amongst all of the installed devices and individual server caps will be changed to match the server load. This will optimize the performance of the servers while ensuring that the enclosure stays below the cap value.



### HP BladeSystem c-Class Overview

### **Rack Airflow** Requirements

### Rack 10000 G2 series cabinets

The increasing power of new high-performance processor technology requires increased cooling efficiency for rack-mounted servers. The G2 10000 Series Racks provide enhanced airflow for maximum cooling, allowing these racks to be fully loaded with servers using the latest processors.

NOTE: For operation with the DC Input Module the G2 1000 Series Rack Extension is required to allow DC Power Cabling to be installed.

CAUTION: If a third-party rack is used, observe the following additional requirements to ensure adequate airflow and to prevent damage to the equipment:

- Front and rear doors: If your 42U server rack includes closing front and rear doors, you must allow 830 square inches (5,350 sq cm) of hole evenly distributed from top to bottom to permit adequate airflow (equivalent to the required 64 percent open area for ventilation).
- The clearance from face of rack to inside of the front door needs to be 1.75" minimum.
- Side: The clearance between the installed rack component and the side panels of the rack must be a minimum of 2.75 inches (7 cm).
- Depth: Minimum 39.4 inches (1000mm) for AC power, 47 inches (1200mm) for DC Power Input
- Adjustable rack rails are shipped with each enclosure:
  - Minimum rail length: 25 inches (635mm)
  - Maximum rail length: 34 inches (864mm)

**CAUTION:** Always use blanking panels to fill all remaining empty front panel U-spaces in the rack. This arrangement ensures proper airflow. Using a rack without blanking panels results in improper cooling that can lead to thermal damage.

### for Servers and Storage

Factory Express Portfolio HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

> Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging and custom packaging. HP products supported through Factory Express include: a wide array of servers and storage: HP Integrity, HP ProLiant & HP ProLiant & Integrity Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: http://www.hp.com/go/factory-express

### **HP Simple Configurator**

SCE is a guided self service tool to help sales and non technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact HP's Customer Business Center or an Authorized Partner for assistance. http://www.hp.com/products/configurator

### **HP Insight management** software

Insight Management

Managing the growing number of servers can be complex and expensive for your organization. IT managers need to address changing business needs with tools that meet the challenges of managing today's complex Datacenters.

HP Insight Management lowers the cost of running your HP ProLiant servers



### HP BladeSystem c-Class Overview

by providing you with best-in-class management tools, including HP Insight Control, HP Virtual Connect Enterprise Manager (VCEM), and HP Insight Dynamics / Matrix Operating Environment. Insight Management increases your productivity and reduces your operating costs to get you higher value from your HP ProLiant servers.

Electronic download of Insight Management Media Insight Management software media is available for free download (not including license entitlement certificates) at this website: http://www.hp.com/go/insightupdates.

Software media available for download includes:

- HP Insight Control
- HP Insight Control for Microsoft® System Center
- HP Insight Control for VMware vCenter Server
- HP Virtual Connect Enterprise Manager (VCEM)
- HP Insight Dynamics / Matrix Operating Environment

Customers will receive an Insight Control or Insight Dynamics license entitlement certificate via physical shipment or email. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s).

One year of 24x7 Software Technical Support and Updates are included with your purchased licenses.

HP provides a complete range of installation and support services to ensure the successful deployment and operations of your server infrastructure. For more information about support services and licensing options, see the following website:

http://www.hp.com/go/insightsoftware

Insight Software Media Kit (DVDs)

Physical media (DVDs) are also available for purchase from HP or from your authorized reseller

Service Pack for ProLiant

Customers should use the HP Service Pack for ProLiant (SPP) to perform firmware, driver, and related software updates

- SPP main webpage: www.hp.com/go/spp
- SPP downloads webpage: www.hp.com/go/spp/download

HP Integrated Lights-Out (iLO)

HP Integrated Lights-Out (iLO) simplifies server setup, health monitoring, power and thermal control, and lights-out remote administration of ProLiant ML, DL, and BL servers. HP iLO functions without additional software and can be accessed from any location via a web browser. HP iLO works hand-in-hand with HP Systems Insight Manager, Insight Control and Insight Dynamics for ProLiant, helping customers unleash the value of the ProLiant platform and deliver the highest possible quality of IT service. For more information, visit: www.hp.com/go/iLO

**HP Insight Control** 

HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy,

### HP BladeSystem c-Class Overview

monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see

http://www.hp.com/go/insightcontrol.

HP Insight Control includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit: http://www.hp.com/services/insight.

HP Matrix Operating Environment The HP Matrix Operating Environment (Matrix OE) for ProLiant and Integrity servers is an integrated command center that helps you instantly adjust to dynamic business demands. This advanced infrastructure management software lets you reduce the cost of common data center tasks by up to 40 percent while keeping pace with your changing business.

The HP Matrix OE includes the automated provisioning, optimization, and recovery management capabilities for HP CloudSystem Matrix, the ideal platform for private cloud and Infrastructure as a Service (laaS).

NOTE: For more information, visit: http://www.hp.com/go/matrixoe

### **HP Power Advisor**

The HP Power Advisor is a tool provided by Hewlett-Packard to assist in the estimation of power consumption and proper selection of components including power supplies at a system, rack, and multirack level. A variety of additional features are also provided including a condensed bill of materials, a cost of owner ship calculator, and a power report. The HP Power Advisor allows for the mixing of rack, tower, blade, and other products in a single environment.

Available at: www.hp.com/go/hppoweradvisor



### Service and Support

### **Service and Support**

### HP Technology Services for Industry Standard Servers and BladeSystem

Capitalizing on HP ProLiant server and HP BladeSystem capabilities requires a service partner who understands your increasingly complex business technology environment. That's why it makes sense to team up with the people who know HP infrastructure hardware and software best - the experienced professionals at HP Services.

### Protect your business beyond warranty with HP Care Pack Services

HP Care Pack services offer complete care and support expertise with committed response choices designed to meet your IT and business needs.

HP Foundation Care services offer scalable reactive support-packages for HP servers and software. You can choose the type and level of service that is most suitable for your IT and business needs. HP Proactive Care delivers high levels of system availability through proactive service management and advanced technical response. HP Datacenter Care provides highly flexible environmental support to address unique customer business needs.

Choose a recommended service appropriate to your ISS or Integrity product or contact your HP sales representative or authorized HP ServiceOne partner for additional HP Care Pack services information.

### Recommended HP Care Pack Services for your HP product

### **Optimized Care**

### 3-Year HP 6 hour Call to Repair Response, Proactive Care

Combined reactive and proactive support for hardware and software helping optimize your systems and delivering high levels of availability through proactive service management and advanced technical response. Hardware problem resolution to return the hardware in operating condition within 6 hours of the initial service request. A Technical Account Manager, as your single point of contact, will own your call or issue end to end until resolved.

http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855EEE.pdf

### HP Installation and Startup Service for HP BladeSystem c-Class Infrastructure for c7000 enclosure

Provides for hardware installation (c-Class ProLiant and Integrity server blades, storage blades, Ethernet Interconnects and Virtual Connect) and software installation and startup of a BladeSystem c7000 Infrastructure in a single enclosure including deployment of OS (two servers), HP Insight Control and Server Deployment (formerly RDP).

http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA0-5964ENW.pdf

### HP Installation and Startup Service for HP BladeSystem c-Class Enhanced Network

HP Provides for the configuration and testing of BladeSystem Ethernet interconnect switches and Virtual Connect to facilitate proper implementation of network protocols and access to advanced features. http://h20195.www2.hp.com/V2/GetPDF.aspx/4aa0-5969ENW.pdf

### **Standard Care**

### 3-Year HP 24x7 4 hour response, Proactive Care Service

This service gives you combined reactive and proactive support including rapid access to our Advanced Solution Center to manage and prevent problems and a Technical Support Specialist with a broad level of technical knowledge that will engage with additional technical expertise as needed from HP's vast global resources.

http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855EEE.pdf

### HP Installation and Startup Service for HP BladeSystem c-Class Infrastructure for c7000 enclosure

Provides for hardware installation (c-Class ProLiant and Integrity server blades, storage blades, Ethernet Interconnects and Virtual Connect) and software installation and startup of a BladeSystem c7000 Infrastructure in a single enclosure including deployment of OS (two servers), HP Insight Control and Server



### Service and Support

Deployment (formerly RDP).

http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA0-5964ENW.pdf

### HP Installation and Startup Service for HP BladeSystem c-Class Enhanced Network

HP Provides for the configuration and testing of BladeSystem Ethernet interconnect switches and Virtual Connect to facilitate proper implementation of network protocols and access to advanced features. http://h20195.www2.hp.com/V2/GetPDF.aspx/4aa0-5969ENW.pdf

### Related Services HP Proactive Care Personalized Support - Environmental Option

The Personalized Support option provides an assigned Account Support Manager who can bring best practices from across the industry plus extra technical skills to your IT team. This option is only available as an add-on to HP Proactive Care Support.

### **HP Proactive Select Service**

Provides a flexible way to purchase HP best-in-class consultancy and technical services. You can buy Proactive Select Service Credits when you purchase your hardware and then use the credits over the next 12 months. http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA2-3842ENN.pdf

Additional HP Care Pack services can be found at: http://www.hp.com/go/cpc

### Recommended HP Care Pack Services for your HP Integrity product

### **Optimized Care**

**Standard Care** 

### 3- Year HP Critical Service

This service offers high performance reactive services and proactive components designed to minimize planned and unplanned downtime. The key feature of this service is an assigned support team including an Account Support Manager (ASM), Remote Support Account Advocate, Mission Critical Hardware Specialist and access to HP's Global Mission Critical Solution Center to help resolve complex issues faster. Reactive support components of this service include 24x7 HW and SW coverage, 6-hour Call-to-Repair commitment, enhanced parts inventory and accelerated escalation management.

http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA0-1613ENW.pdf

### **HP Integrity C7000 Enclosure Startup Service**

This service provides efficient and effective HP Integrity Blade infrastructure setup for the server infrastructure including all hardware and networking components. http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA1-1651ENW.pdf

### HP Installation and Startup Service for HP BladeSystem c-Class Enhanced Network

HP Provides for the configuration and testing of BladeSystem Ethernet interconnect switches and Virtual Connect to facilitate proper implementation of network protocols and access to advanced features. http://h20195.www2.hp.com/V2/GetPDF.aspx/4aa0-5969ENW.pdf

### 3-Year HP Proactive 24

This service offers improved stability, availability, and operational effectiveness through integrated hardware and software support services that combine industry-leading reactive technical assistance with proactive account services delivered by an ASM, giving you IT management support with a team of service specialists. http://h20195.www2.hp.com/V2/GetPDF.aspx/4AAO-1614ENW.pdf

### **HP Integrity C7000 Enclosure Startup Service**

This service provides efficient and effective HP Integrity Blade infrastructure setup for the server infrastructure including all hardware and networking components. http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA1-1651ENW.pdf

### HP Installation and Startup Service for HP BladeSystem c-Class Enhanced Network

HP Provides for the configuration and testing of BladeSystem Ethernet interconnect switches and Virtual Connect to facilitate proper implementation of network protocols and access to advanced features.



### Service and Support

http://h20195.www2.hp.com/V2/GetPDF.aspx/4aa0-5969ENW.pdf

### **Related Services**

### **HP Factory Express**

When you add additional enclosures to your environment, consider HP Factory Express. HP Factory Express provides customization and deployment services along with your storage and server purchases. You can customize hardware to your exact specifications in the factory-helping speed deployment. http://hp.com/go/factoryexpress

### Insight Online/Insight Remote Support

HP Insight Remote Support provides 24 X 7 remote monitoring, proactive notifications, and problem resolution. This comes at no additional cost with your HP solution. Learn more about Insight Remote Support http://www.hp.com/go/insightremotesupport and Insight Online http://www.hp.com/go/insightonline

**NOTE:** Insight Remote Support is a prerequisite for Proactive Care. All blades within a single HP BladeSystem enclosure must be at the same service level.

### **HP Support Center**

Personalized online support portal with access to information, tools and experts to support HP business products. Submit support cases online, chat with HP experts, access support resources or collaborate with peers. Learn more http://www.hp.com/go/hpsc

HP's Support Center Mobile App allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HP Insight Remote Support and HP Support Center are available at no additional cost with a HP warranty, HP Care Pack or HP contractual support agreement.

### **NOTE:** HP Support Center Mobile App is subject to local availability.

### **Parts and Materials**

HP will provide HP-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HP due to malfunction.

### For more information

To learn more on HP ProLiant servers and HP BladeSystem servers, please contact your HP sales representative or HP Authorized Channel Partner. Or visit:

www.hp.com/services/bladesystem



### **HP BladeSystem c7000 Enclosure**

714684-S21

## QuickSpecs

### **Smart Buys**

**Smart Buy Models** HP c7000 2xVC-10D 6P10F 16xIC Encl/S-Buy 714683-S21

Includes: c7000 Platinum enclosure with 2 Virtual Connect Flex-10/10D modules, 2 On Board Administrator modules, 6 Platinum Power supplies, Single Phase Intelligent

Power Module, 10 fans and 16 Insight Control Licenses

HP c7000 2xVCFF 6P10F 16xIC Encl/S-Buy

Includes: c7000 Platinum enclosure with 2 Virtual Connect FlexFabric modules, 2 On Board Administrator modules, 6 Platinum Power supplies, Single Phase Intelligent

Power Module, 10 fans and 16 Insight Control Licenses



### **Configuration Information Factory Integrated Models**

For a complete configuration of the HP BladeSystem, please do the following:

### Step 1: Select desired model, configuration and quantity of HP ProLiant server and Storage blades

NOTE: HP BladeSystem c3000 and c7000 enclosures support mixing of G1 through Gen8, and Integrity server blades in the same enclosure

**NOTE:** For server blade information, please visit:

http://h18000.www1.hp.com/products/guickspecs/north\_america/12534.html

**NOTE:** For Storage Blade information, please visit:

http://h18000.www1.hp.com/products/quickspecs/12587\_na/12587\_na.html

### Step 2: Determine quantity of HP BladeSystem c-Class Enclosures to purchase and choose Required Options (One of the following from each list unless otherwise noted):

NOTE: Each HP BladeSystem c-Class Server Blade Enclosure holds up to 16 half-height blades. Server blanks will be shipped in all empty bays.

### **Base Server Blade Enclosure Configuration**

c-Class Server Blade

HP BladeSystem BLc7000 HP BLc7000 Configure-to-order Enclosure with ROHS Trial Insight Control License

681844-B21 507019-B21

**Enclosures** HP Integrity BLc7000 CTO Enclosure AD361D

NOTE: CTO models include 1x BladeSystem Onboard Administrator with KVM, 4x Active

HP BLc7000 Configure-to-order 3 In LCD ROHS Enclosure

Cool 200 Fans and 0x power supplies.

**NOTE:** All c-Class enclosures support HP ProLiant, Integrity and blades in either mixed or homogenous configurations. The AD361D enclosure is suggested for configurations

primarily used with Integrity blades.

### Required Options (one of the following from each category unless otherwise noted)

**HP Power Supplies** 

**c-Class Power Modules** (1 per enclosure)

HP Single Phase FIO Intelligent Power Module for c-Class BladeSystem

677595-B21

**NOTE:** Option for Power Discovery Services. HP BLc7000 1 PH FIO Power Module Option

413379-B21

HP BLc7000 3 PH NA/JP FIO Power Module Option

413380-B21

HP BLc7000 -48V DC Power Input Module

**AH331A** 

c-Class Power Supply (Up to 6)

HP 6X 2650W Platinum Hot Plug Power Supply Kit

733460-B21

**NOTE:** OA FW 3.73 minimum requirement

NOTE: The bundle includes a quantity of 6 HP 2650W Platinum 94% PSU so a full

enclosure can be configured with a single part number.

**NOTE:** HP BladeSystem Power supplies meet multiple Energy Efficiency Initiatives: 2400W, 94%: Climate Savers Computing Initiative PLATINUM and ECOS Consulting 80

Plus Platinum.



### **Configuration Information Factory Integrated Models**

<b>,-</b>	
HP 2650W Platinum Hot Plug Power Supply Kit  NOTE: OA FW 3.73 minimum requirement  NOTE: HP BladeSystem Power supplies meet multiple Energy Efficiency Initiatives: 2650W, 94%: Climate Savers Computing Initiative Platinum and ECOS Consulting 80 Plus Platinum	733459-B21
HP 6X 2400W Platinum Hot Plug Factory Integrated Power Supply Kit  NOTE: The bundle includes a quantity of 6 HP 2400W Platinum 94% PSU so a full enclosure can be configured with a single part number.  NOTE: HP BladeSystem Power supplies meet multiple Energy Efficiency Initiatives: 2400W, 94%: Climate Savers Computing Initiative Platinum and ECOS Consulting 80 Plus Platinum.	517521-B22
HP 2400W Platinum Hot Plug Power Supply Kit  NOTE: HP BladeSystem Power supplies meet multiple Energy Efficiency Initiatives: 2400W, 94%: Climate Savers Computing Initiative Platinum and ECOS Consulting 80 Plus Platinum.	588603-B21
HP 6X 2400W Gold Hot Plug Factory Integrated Power Supply Kit  NOTE: The bundle includes a quantity of 6 HP 2400W High Efficiency PSU so a full enclosure can be configured with a single part number.	517521-B21
HP 2400W Gold Hot Plug Power Supply Kit	499243-B21
HP 2250W -48VDC Hot Plug Power Supply Kit  NOTE: Only compatible with -48V DC Power Input Module.	AH332A
<b>NOTE:</b> Mixing of power supplies in the same enclosure is Not SUPPORTED. All power supplies must be of the same type. All HP 2400W Platinum, 2400W HE, HP2250W, or -48V DC must be homogeneous.	
<b>NOTE:</b> If Three Phase Power Module selected, a minimum of 3 Power Supply Option Kits are needed. For full redundancy 6 Power Supply Option Kits are required.	
c-Class Active Cool Fan (Up to 6)	
HP BLc 6X Active Cool 200 Factory Integrated Fan Option  NOTE: The bundle includes a quantity of 6 HP Active Cool 200 Fans so a full enclosure can be configured with a single part number.	517520-B21
HP BLc7000 Enclosure HP Single Active Cool Fan Option Kit	412140-B21
<b>NOTE:</b> A minimum of 4 Active Cool 200 Fans is required, 8 Active Cool 200 Fans can support a full blade enclosure, 10 Active Cool 200 Fans should be ordered for reduced	



**HP Cooling Options** 

**NOTE:** Single-Phase models may require additional power supplies. Fans should be added to provide redundancy, reduce power consumption and reduce noise. **NOTE:** Three-Phase models require a minimum of 6 Active Cool 200 Fans.

power consumption and noise reduction.

**NOTE:** Some Blade configurations require 10 fans.

**Configuration Information Factory Integrated Models** 

# Step 3: Select optional software bundle (if nothing is selected system will ship with 16 Insight Control Trial Licenses):

HP Insight Software Enclosure Options

HP Insight Control Encl FIO Bundle 8 Lic

C6N32A

**NOTE:** This license supports HP ProLiant c-Class blade servers.

**NOTE:** Must be purchased as an option to an HP BladeSystem enclosure. FIO can only be ordered as part of a factory-configured platform. Customer will receive a printed

license entitlement certificate via physical shipment.

HP Insight Control Enc FIO Bundle 16 Lic

C6N33A

**NOTE:** This license supports HP ProLiant c-Class blade servers.

**NOTE:** Must be purchased as an option to an HP BladeSystem enclosure. FIO can only be ordered as part of a factory-configured platform. Customer will receive a printed

license entitlement certificate via physical shipment.

HP BladeSystem c-Class Ethernet Interconnects

HP Virtual Connect Flex-10/10D Module for c-Class BladeSystem

638526-B21

HP Virtual Connect Flex-10/10D Module Enterprise Edition for BLc7000 Option

662048-B21

### Step 4: Select optional Redundant BladeSystem Onboard Administrator Capability

HP c-Class Enclosure Options

HP BLc7000 Onboard Administrator with KVM Option

**NOTE:** With 1 Gb/s Adapters.

456204-B21

**NOTE:** The HP c7000 OA supports the mixing with the HP c7000 OA with KVM. The HP c7000 OA with KVM must be the active OA to provide the Enclosure KVM feature. The KVM menu has an OA CLI button at the bottom, which allows an OA administrator to log into the OA and be able to force a takeover so the OA with KVM will become the standby OA. The OA Firmware Sync feature cannot be used to update mismatched OA modules. Mismatched OA firmware versions between the original c7000 OA and c7000 OA with KVM require the administrator to use the GUI or CLI to update the OA firmware file (http, ftp, tftp, local client file using the GUI or USB key containing the OA firmware file). **NOTE:** Models of the c7000 enclosure (part numbers 681844-B21 and AD361D) come with a BladeSystem Onboard Administrator with KVM as standard. Order this part number (456204-B21) when a second redundant BladeSystem Onboard Administrator is desired for a c7000 enclosure.

### Step 5: Select 1 or more interconnect modules for each enclosure

The following is a list of various HP BladeSystem c-Class interconnect modules (Virtual Connect, Ethernet, Fibre Channel, InfiniBand, and SAS interconnects). For detailed interconnect options consult the specific interconnect QuickSpecs:

http://h18004.www1.hp.com/products/blades/components/c-class-interconnects.html

A pair of interconnects must be ordered if redundancy is required.

**NOTE:** Options for specific c-Class interconnects are NOT included in the list below. Consult the individual interconnect QuickSpecs to obtain part numbers for interconnect options such as cables, SFPs, etc.

**HP BladeSystem** 

HP Virtual Connect Flex-10 10Gb Ethernet Module for c-Class BladeSystem

455880-B21



### **Configuration Information Factory Integrated Models**

c-Class Network Interconnects	HP Virtual Connect Flex-10 Ethernet Module Enterprise Edition for BLc7000 Option NOTE: Includes two HP Virtual Connect Flex-10 10Gb Ethernet modules plus one BLc7000 enclosure license for HP Virtual Connect Enterprise Manager software. The license entitlement certificate must be redeemed online or via fax to obtain the VCEM license activation key.	591973-B21
	HP Virtual Connect FlexFabric 10/24 Enterprise Edition BLc7000 Option NOTE: Includes 2 x HP Virtual Connect FlexFabric 10Gb/24-port modules plus 1 x VCEM BL-c7000 enclosure license. Customer will receive a printed license entitlement certificate and 2 Virtual Connect modules as a single deliverable. The license entitlement certificate must be redeemed online or via fax to obtain the VCEM license activation key.	605865-B21
	HP Virtual Connect FlexFabric 10Gb/24-port Module for c-Class BladeSystem	571956-B21
	HP 6125G Ethernet Blade Switch	658247-B21
	HP 6125G/XG Ethernet Blade Switch	658250-B21
	HP X130 10G SFP+ LC SR Transceiver	JD092B
	HP 6120G/XG Ethernet Blade Switch	498358-B21
	HP 6120XG Blade Switch	516733-B21
	HP 1GB Ethernet Pass-Thru Module for c-Class BladeSystem	406740-B21
	HP 10GbE Ethernet Pass-Thru Module for c-Class BladeSystem	538113-B21
	Mellanox SX1018HP Ethernet Switch for c-Class BladeSystem	689638-B21
	Cisco Catalyst 1/10GbE 3120X Blade Switch	451439-B21
	Cisco Catalyst 1GbE 3120G Blade Switch	451438-B21
	Cisco Catalyst Blade Switch 3020 for HP c-Class BladeSystem	410916-B21
	HP Cisco B22HP Fabric Extender for BladeSystem c-Class	641146-B21
	HP Cisco B22HP Fabric Extender with 16 FET for BladeSystem c-Class	657787-B21
	HP GbE2c Layer 2/3 Ethernet Blade Switch	438030-B21
	HP 1:10Gb Ethernet Blade Switch for c-Class BladeSystem	438031-B21
	HP MDS 8/12c BladeSystem Fabric Switch	AW563A
	HP MDS 8/24c BladeSystem Fabric Switch	AW564A
	Cisco MDS 9124e Switch for c-Class BladeSystem 12-port Upgrade LTU	T5169A
	<b>NOTE:</b> The HP BladeSystem c-Class Network Interconnects ship as single units. The above interconnects must be ordered in quantities of two for redundancy support.	
HP BladeSystem	HP Virtual Connect 8Gb 24-port Fibre Channel Module for c-Class BladeSystem	466482-B21
c-Class SAN Interconnects	HP Virtual Connect 8Gb 20-port Fibre Channel Module for c-Class BladeSystem	572018-B21
	HP 4GB Fibre Channel Pass-thru Module for c-Class BladeSystem	403626-B21
	HP B-series 8/12c SAN Switch for BladeSystem c-Class	AJ820B
	HP B-series 8/24c SAN Switch for BladeSystem c-Class	AJ821B
	HP B-series 8/24c Power Pack+ SAN Switch for BladeSystem c-Class	AJ822B
	HP B-series 8/12c SAN Switch for BladeSystem c-Class 12-port Upgrade LTU	T5517A
HP SAS Switch	HP 3Gb 8-port SAS 2.0 BL-c Switch Module for BladeSystem c-Class Enclosure	AJ864A
HP BladeSystem	HP 4X QDR QLogic InfiniBand Switch Module for c-Class BladeSystem	505958-B21
InfiniBand Interconnects	QLogic InfiniBand 4X QDR Management Module for c-Class BladeSystem	505959-B21



### **Configuration Information Factory Integrated Models**

HP 4X QDR II	nfiniBand Switch Module for c-Class BladeSystem	489184-B21
NOTE: Quad	Data Rate (QDR) InfiniBand Switch Modules are only supported in the RoHS	
6 of 6 compl	iant enclosures (part numbers starting with 507) and G6 Blades.	
HP 4X FDR In	finiBand Managed Switch Module for c-Class BladeSystem	648311-B21
HP 4X FDR Ir	ifiniBand Switch Module for c-Class BladeSystem	648312-B21

### Step 6: Select rack power distribution for single-phase models

**NOTE:** A pair of PDUs must be ordered for AC Feed redundancy.

<b>HP Power</b>	Distribution
llnite	

### **HP Monitored Power Distribution Unit**

HP 17.3kVA 48A Single Input Three Phase Monitored Power Distribution Unit

NOTE: Please see the QuickSpecs for Technical Specifications and additional

http://h18000.www1.hp.com/products/quickspecs/12118\_na/12118\_na.html

#### **HP Modular Power Distribution Units**

HP 17.3kVA 48A Three Phase Modular Power Distribution Unit

HP 14.4kVA 40A Three Phase NA/JP Modular Power Distribution Unit

HP 8.6kVA 24A Three Phase Modular Power Distribution Unit

AF512A

HP 8.3kVA 40A High Voltage Core Modular Power Distribution Unit

252663-D75

HP 4.9kVA 24A High Voltage Core Modular Power Distribution Unit

252663-D74

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional

information:

information:

http://h18000.www1.hp.com/products/quickspecs/11041\_na/11041\_na.html

**NOTE:** The Core Only Modular Power Distribution Unit Kits excludes the extension bars as they are not required with the HP BladeSystem

HP Two C13 PDU Extension Bar

**NOTE:** Each extension bar has a C19 input and 7 C13 receptacles. The option is ideal for model S348, and, model S332, which both have only C19 outlets (12) and for all Core

Only Modular PDUs.

# Step 7: Select optional Power Cords for Single Phase Model (power cords are listed under options)

NOTE: Default power cord is a 6ft IEC C19 - C20 cord



AF500A

### **Configuration Information Factory Integrated Models**

HP Intelligent Power Distribution Units Power	<b>NOTE:</b> Order with HP Single Phase FIO Intelligent Power Module for c-Class BladeSystem (P/N 677595-B21).		
cords	HP 2.0m 250V 16A C19-C20 WW Single IPD Enabled Jumper Cord	TK738A	
(HP C19 to C20)	HP 2.0m 250V 16A C19-C20 WW 3PC Kit IPD Enabled Jumper Cord	TK739A	
	HP 2.5m 250V 16A C19-C20 WW Single IPD Enabled Jumper Cord	TK740A	
	HP 2.5m 250V 16A C19-C20 WW 3PC Kit IPD Enabled Jumper Cord	TK741A	
	HP 3.0m 250V 16A C19-C20 WW Single IPD Enabled Jumper Cord	TK742A	
	HP 3.0m 250V 16A C19-C20 WW 3PC Kit IPD Enabled Jumper Cord	TK743A	
	HP 1.37m 250V 16A C19-C20 WW Single IPD Enabled Jumper Cord	TK744A	
	HP 1.37m 250V 16A C19-C20 WW 3PC Kit IPD Enabled Jumper Cord	TK745A	
<b>HP Power Distribution</b>	HP C19 - C20 WW 250V 16Amp Flint Gray 1.20m Jumper Cord	AF575A	
Units Power cords (HP C19 to C20)	HP C19 - C20 WW 250V 16Amp Flint Gray 2.0m Jumper Cord	AF574A	
	HP C19 - C20 WW 250V 16Amp 2.5m Jumper Cord	295633-B22	
	HP C19 - C20 WW 250V 16Amp 4.5m Jumper Cord	E7804A	



### **Related Options**

HP Enclosure Options	HP BLc7000 Onboard Administrator with KVM Option  NOTE: The HP c7000 OA supports the mixing with the HP c7000 OA with KVM. The HP c7000 OA with KVM must be the active OA to provide the Enclosure KVM feature. The KVM menu has an OA CLI button at the bottom, which allows an OA administrator to log into the OA and be able to force a takeover so the OA with KVM will become the standby OA. The OA Firmware Sync feature cannot be used to update mismatched OA modules. Mismatched OA firmware versions between the original c7000 OA and c7000 OA with KVM require the administrator to use the GUI or CLI to update the OA firmware file (http, ftp, tftp, local client file using the GUI or USB key containing the OA firmware file).  NOTE: Models of the c7000 enclosure (PN 681840-B21, 681842-B21, and 681844-B21) come with a BladeSystem Onboard Administrator with KVM as standard. Order (P/N 456204-B21) when a second redundant BladeSystem Onboard Administrator is desired for a c7000 enclosure.	456204-B21
	HP BLc7000 10000 Series Rack Shipping Bracket Option  NOTE: The shipping bracket is required when shipping a c7000 enclosure when installed in a rack. It is not required for normal operation.	433718-B21
	HP BLc7000 Miscellaneous Blanks Option Kit  NOTE: This kit should only be ordered to replace lost or damaged blanks.	412148-B21
	HP BLc7000 Server Blank w/Coupler Option  NOTE: The coupler allows half-height server blanks to be coupled together to create a full-height server blank.  NOTE: This kit should only be ordered to replace lost or damaged blanks.	412150-B21
HP Power Supplies	HP 2650W Platinum Hot Plug Power Supply Kit  NOTE: 0A FW 3.73 minimum requirement  NOTE: HP BladeSystem Power supplies meet multiple Energy Efficiency Initiatives: 2650W, 94%: Climate Savers Computing Initiative Platinum and ECOS Consulting 80 Plus Platinum	733459-B21
	HP 2400W Platinum Hot Plug Power Supply Kit  NOTE: HP BladeSystem Power supplies meet multiple Energy Efficiency Initiatives: 2400W, 94%: Climate Savers Computing Initiative Platinum and ECOS Consulting 80 Plus Platinum.	588603-B21
	HP 2400W Gold Hot Plug Power Supply Kit  NOTE: Supplied with 2m/6ft IEC C20 - C19 jumper cord.  NOTE: HP BladeSystem Power supplies meet multiple Energy Efficiency Initiatives: 2400W, 92%: Climate Savers Computing Initiative GOLD and ECOS Consulting 80 Plus GOLD.	499243-B21
	HP 2250W -48VDC Hot Plug Power Supply Kit	AH332A
	HP BLc7000 -48V DC Power Input Module	AH331A
	<b>NOTE:</b> Mixing of power supplies in the same enclosure is not supported. All power supplies must be of the same type, all HP 2400W HE, all HP2250W or all -48V DC.	



**NOTE:** The 80 PLUS program is a unique forum that unites electric utilities, the computer industry, and consumers in an effort to bring energy efficient technology solutions to the marketplace. 80 Plus independently tests power supply efficiency and

publically posts the results on 80Plus.org."

### **Related Options**

retated options		
<b>HP Cooling Options</b>	HP c-Class Active Cool Fan	
	HP BLc7000 Enclosure HP Single Active Cool Fan Option Kit	412140-B21
	NOTE: A minimum 4 Active Cool 200 Fans is required, 8 Active Cool 200 Fans can	
	support a full blade enclosure, 10 Active Cool 200 Fans should be ordered for reduced power consumption and noise reduction. Some Blade configurations require 10 fans.	
HP BladeSystem	HP Virtual Connect Flex-10 10Gb Ethernet Module for c-Class BladeSystem	455880-B21
c-Class Network Interconnects	HP Virtual Connect Flex-10 Ethernet Module Enterprise Edition for BLc7000 Option  NOTE: Includes 2 x HP Virtual Connect Flex-10 10Gb Ethernet modules plus 1 x VCEM  BL-c7000 enclosure license. Customer will receive a printed license entitlement certificate and 2 Virtual Connect modules as a single deliverable. The license entitlement certificate must be redeemed online or via fax to obtain the VCEM license activation key  NOTE: For additional license kits, please visit: http://h18000.www1.hp.com/products/quickspecs/12860_na/12860_na.html	591973-B21
	HP Virtual Connect FlexFabric 10/24 Enterprise Edition BLc7000 Option  NOTE: Includes 2 x HP Virtual Connect FlexFabric 10Gb/24-port modules plus 1 x VCEM  BL-c7000 enclosure license. Customer will receive a printed license entitlement  certificate and 2 Virtual Connect modules as a single deliverable. The license entitlement certificate must be redeemed online or via fax to obtain the VCEM license activation key.	605865-B21
	HP Virtual Connect FlexFabric 10Gb/24-port Module for c-Class BladeSystem	571956-B21
	HP 6125G Ethernet Blade Switch	658247-B21
	HP 6125G/XG Ethernet Blade Switch	658250-B21
	HP 6120G/XG Ethernet Blade Switch	498358-B21
	HP 6120XG Blade Switch	516733-B21
	HP 1GB Ethernet Pass-Thru Module for c-Class BladeSystem	406740-B21
	HP 10GbE Ethernet Pass-Thru Module for c-Class BladeSystem	538113-B21
	Mellanox SX1018HP Ethernet Switch for c-Class BladeSystem	689638-B21
	Cisco Catalyst 1/10GbE 3120X Blade Switch	451439-B21
	Cisco Catalyst 1GbE 3120G Blade Switch	451438-B21
	Cisco Catalyst Blade Switch 3020 for HP c-Class BladeSystem	410916-B21
	HP Cisco B22HP Fabric Extender for BladeSystem c-Class	641146-B2
	HP Cisco B22HP Fabric Extender with 16 FET for BladeSystem c-Class	657787-B21
	HP GbE2c Layer 2/3 Ethernet Blade Switch	438030-B21
	HP 1:10Gb Ethernet Blade Switch for c-Class BladeSystem	438031-B21
	HP MDS 8/12c BladeSystem Fabric Switch	AW563A
	HP MDS 8/24c BladeSystem Fabric Switch	AW564A
	Cisco MDS 9124e Switch for c-Class BladeSystem 12-port Upgrade LTU	T5169A
	<b>NOTE:</b> The HP BladeSystem c-Class Network Interconnects ship as single units. The above interconnects must be ordered in quantities of two for redundancy support.	
HP BladeSystem	HP Virtual Connect 8Gb 24-port Fibre Channel Module for c-Class BladeSystem	466482-B21
c-Class SAN Interconnects	HP Virtual Connect 8Gb 20-port Fibre Channel Module for c-Class BladeSystem	572018-B21
	HP 4GB Fibre Channel Pass-thru Module for c-Class BladeSystem	403626-B21
	HP B-series 8/12c SAN Switch for BladeSystem c-Class	AJ820B



### **Related Options**

Related Options		
	HP B-series 8/24c SAN Switch for BladeSystem c-Class	AJ821B
	HP B-series 8/24c Power Pack+ SAN Switch for BladeSystem c-Class	AJ822B
	Brocade 4/12 SAN Switch Upgrade RTU for HP BladeSystem c-Class	AE373A
	HP MDS 8/12c Fabric Switch 12-port Upgrade LTU  NOTE: Licensed per switch.	TA804A
	HP MDS Fabric Manager Server for BladeSystem c-Class LTU <b>NOTE:</b> Licensed per switch.	TC316A
	HP MDS Enterprise Package for BladeSystem c-Class LTU  NOTE: Licensed per switch.	TC317A
	HP MDS Fabric Manager Server Enterprise Package for BladeSystem c-Class LTU <b>NOTE:</b> Licensed per switch.	TC318A
HP SAS Switch	HP 3Gb 8-port SAS 2.0 BL-c Switch Module for BladeSystem c-Class Enclosure	AJ864A
	HP 6Gb SAS BL Switch Single Pack	BK763A
	HP 6Gb SAS BL Switch Dual Pack	BK764A
	<b>NOTE:</b> Please see the QuickSpecs for Technical Specifications and additional information at:	
	http://h18000.www1.hp.com/products/quickspecs/13960_na/13960_na.html	
HP BladeSystem	HP 4X QDR QLogic InfiniBand Switch Module for c-Class BladeSystem	505958-B21
InfiniBand Interconnects	QLogic InfiniBand 4X QDR Management Module for c-Class BladeSystem	505959-B21
	HP 4X QDR InfiniBand Switch Module for c-Class BladeSystem  NOTE: Quad Data Rate (QDR) InfiniBand Switch Modules are only supported in the RoHS 6 of 6 compliant enclosures and G6 Blades.	489184-B21
	HP 4X FDR InfiniBand Managed Switch Module for c-Class BladeSystem	648311-B21
	HP 4X FDR InfiniBand Switch Module for c-Class BladeSystem	648312-B21
HP Optical Drives	HP Integrity USB External DVD/RW Drive	AT120A
HP Insight Software	Insight Control	
	HP Insight Control for BladeSystem including 1yr 24x7 Support Enclosure 8 Server Electronic License	C6N32AAE
	HP Insight Control for BladeSystem including 1yr 24x7 Support Enclosure 16 Server Electronic License	C6N33AAE
	HP Insight Control Server Provisioning Media Kit  NOTE: HP Insight Control 7.2 introduces Insight Control server provisioning, a new capability ideal for multi-server OS and firmware provisioning to ProLiant and BladeSystem servers. Insight Control server provisioning is included and licensed as part of HP Insight Control. A media kit, "HP Insight Control server provisioning USB media kit" (# BD883A), including a USB, is available for customers who require a physical copy of the media loaded with Insight Control server provisioning software. Please note that this media kit is separate and in addition to the "HP Insight Management DVD media kit" (#C6N31A).	BD883A
	HP Insight Management Media Kit	C6N31A



### Related Options

NOTE: HP Insight Management Media Kit contains DVDs without licenses. Contains HP Systems Insight Manager, HP Insight Control, HP Matrix Operating Environment, and Virtual Connect Enterprise Manager software. Uses an integrated installer to perform quick and accurate software installation and updates.

NOTE: Licenses ship without media. The Insight Management Media Kit can be ordered separately, or can be downloaded at: http://www.hp.com/go/insightupdates.

**NOTE:** The "for bundling with an enclosure" license kits can only be ordered together with a BladeSystem c3000 or c7000 enclosure on the same order.

NOTE: Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.

**NOTE:** For additional license kits, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12631\_na/12631\_na.htm

ΗP	iL0	Advan	ced for
Bla	ideS	ystem	License

HP iLO Advanced for BladeSystem including 1yr 24x7 Support Eight Server License

512489-B21

### **HP Virtual Connect Enterprise Manager**

HP Virtual Connect Enterprise Manager including 1yr 24x7 Support Single c7000 **Enclosure Lic** 

459864-B21

NOTE: This license allows 1 BL-c7000 enclosure to be managed with VCEM. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

**NOTE:** For additional license kits, please visit:

http://h18000.www1.hp.com/products/guickspecs/12860 na/12860 na.html

HP c-Class Storage Blades HP StoreEver LTO-5 Ultrium SB3000c Tape Blade

HP D2220sb Configure-to-order Storage Blade

BS580B

NOTE: Please see the QuickSpecs for Technical Specifications and additional information

http://h18000.www1.hp.com/products/quickspecs/12729\_na/12729\_na.html

HP BL c-Class SB40c PCI Express Mezzanine Pass Thru Option Kit

431643-B21

NOTE: The mezzanine card is needed to support the D2200sb storage blade with HP c-Class BladeSystem full-height server blades

ctass bladesystem rult-neight server blades.	
HP D2200sb PCIe and P4000 VSA with Smart Array Advance Pack LTU Bundle	AP881A
HP D2200sb PCIe w/12 600GB 6G SAS HDD with Smart Array Advance Pack LTU Bundle	AP882A
HP D2200sb PCIe Storage Blade with Smart Array Advance Pack LTU Bundle	BK781A
HP D2220sb PCIe and StoreVirtual VSA Bundle with SAAP License	QW914A
HP D2220sb PCIe w/(12) 900 GB 6G SAS HDD Bundle with SAAP License	QW915A
HP D2220sb Storage Blade Bundle with SAAP License	QW916A
HP D2220sb Build-to-order Storage Blade	QW917A



QW918A

$\mathbf{D} \mathbf{A}$	コキへん	Opti	anc
R	וחופנו	<i>,</i> , , , , ,	0115
		OPL	0

NOTE: Please see the HP D2200sb Storage Blade QuickSpecs for technical specifications and additional information at:

http://h18000.www1.hp.com/products/quickspecs/13714\_na/13714\_na.html

HP X1800sb G2 Network Storage Blade BV872A HP X3800sb G2 Network Storage Blade **BV874A** HP StoreEasy 3830sb Gtwy Blade Storage **B7E01A** 

### **HP Expansion Blades**

**HP BLc PCI Expansion Blade** 

448018-B21

431643-B21

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional

information:

http://h18000.www1.hp.com/products/quickspecs/12753 na/12753 na.html

HP BL c-Class SB40c PCI Express Mezzanine Pass Thru Option Kit

NOTE: The mezzanine card is needed to support the PCI Expansion Blade (P/N 448018-

B21) with HP c-Class BladeSystem full-height server blades.

### **HP Ultrium Tape Blades**

HP StoreEver LTO-4 Ultrium SB1760c Tape Blade

AQ697B

HP BL c-Class SB40c PCI Express Mezzanine Pass Thru Option Kit

431643-B21

NOTE: The HP PCI Express Mezzanine Pass-Thru Card for HP BladeSystem (431643-B21) is required when installing a tape blade adjacent to a full-height server blade **NOTE:** Please see the QuickSpecs for Technical Specifications and additional

information:

http://h18000.www1.hp.com/products/quickspecs/12729\_na/12729\_na.html

### **HP Power Cords**

### HP LV Power Cords 100 - 120V AC

HP C19 - Nema 5-20P US/CA 125V 20Amp 4.5m Power Cord E7802A

**HP C19 - C20 Jumper Cords** 

HP C19 - C20 WW 250V 16Amp Flint Gray 1.20m Jumper Cord AF575A HP C19 - C20 WW 250V 16Amp Flint Gray 2.0m Jumper Cord AF574A HP C19 - C20 WW 250V 16Amp 2.5m Jumper Cord 295633-B22 HP C19 - C20 WW 250V 16Amp 4.5m Jumper Cord E7804A

HP HV Power Cords 200 - 240V AC

HP C19 -Nema L6-30P US/CA 250V 16Amp 4.5m Power Cord E7805A HP C19 - Nema L6-20P NA/JP 250V 20Amp High Voltage 3.6m Power Cord AF593A HP C19 - IEC-309 DK/SE/AR 250V 16Amp 3.6m Power Cord AF581A

**NOTE:** For additional power cable information, please visit:

HP 240 VAC 4.5M Unterminated End Power Cord

http://h18000.www1.hp.com/products/servers/proliantstorage/powerprotection/options/power-cable.html



E7806A

### Related Options

### **HP Uninterruptible Power HP Rack-mountable UPS**

Systems **R5000 Uninterruptible Power System (UPS)** 

HP R5KVA 3U L630 High Voltage NA/JP Uninterruptible Power System

**NOTE:** Please see the QuickSpecs for additional information:

http://h18004.www1.hp.com/products/quickspecs/14109\_na/14109\_na.html

**R7000 Uninterruptible Power System (UPS)** 

HP R7KVA 4U 50A High Voltage NA/JP Uninterruptible Power System AF462A

**NOTE:** Please see the QuickSpecs for additional information:

http://h18004.www1.hp.com/products/quickspecs/14110\_na/14110\_na.html

HP R5KVA and R7KVA 3U Extended Runtime Module

HP Rack-mountable R8000/R12000 UPS

HP R8000/3 8000kVA Three Phase NA 6U Rackmount Uninterruptible Power System AF431A

HP R12000/3 12000VA Three Phase NA 6U Rackmount Uninterruptible Power System

AF429A **NOTE:** Please see the QuickSpecs for additional information:

http://h18004.www1.hp.com/products/quickspecs/12857\_na/12857\_na.html

**NOTE:** For additional information on sizing your server, please reference:

http://www.upssizer.com

#### **HP Rack Series HP Intelligent Series Rack**

HP 642 1075mm Pallet Intelligent Series Rack BW903A

HP 642 1075mm Shock Intelligent Series Rack

NOTE: HP BladeSystem c7000 Enclosure is not supported in a 14U rack

NOTE: Please see the QuickSpecs for Technical Specifications and additional

http://h18000.www1.hp.com/products/guickspecs/14223 na/14223 na.html

**NOTE:** For additional information regarding Rack Cabinets, please see the following

URL: http://www.hp.com/go/rackandpower

#### **HP Rack Options Keyboards and Monitors**

HP USB BFR with PVC Free Keyboard/Mouse Kit

631341-B21

AF460A

AF464A

BW904A

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional

information:

http://h18000.www1.hp.com/products/guickspecs/13972 na/13972 na.html

HP TFT7600 G2 KVM Console Rackmount Keyboard Monitor

HP TFT7600 G2 KVM Console Rackmount Keyboard TAA Monitor

AZ870A AZ885A

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional

information:

http://h18000.www1.hp.com/products/quickspecs/13731\_na/13731\_na.html

**NOTE:** For additional information regarding Rack Options, please see the following URL:

http://www.hp.com/go/rackandpower



### **Related Options**

### **HP KVM Switches**

HP Server Console 0x2x8 Port Analog Switch	AF616A
HP Server Console 0x2x16 Port Analog Switch	AF617A
HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software	AF618A
HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software	AF621A
HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software	AF622A

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/11834 na/11834 na.html

**NOTE:** Cat5e cables are required to connect Interface Adapters to Consoles Switches. Cat52 cables can be found at the following URL: http://www.hp.com/go/kvm

**NOTE** For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: http://www.hp.com/go/kvm

### **HP Airflow Optimization**

HP 10000 Series Rack Airflow Optimization Kit

AF090A

**NOTE:** The Airflow Optimization kit is designed to prevent hot and cold air from mixing thus optimizing the temperature at which the chilled air enters the racked servers. **NOTE:** When configuring racks through Factory Express, a Rack Optimization kit will automatically ship with the rack. This kit is recommended for all other rack configurations also.

**NOTE:** For additional information regarding Rack Options, please see the following URL: www.racksolutions.com/hp.

### **HP Care Pack Services**

**NOTE:** Some options, including Fibre Channel and InfiniBand switches for the HP c-Class BladeSystem, are not covered under the c7000 enclosure Care Packs and carry separate Care Packs. Care Pack service level support for these options should always be uplifted to match existing storage or server service level.

Please view the option QuickSpecs or contact your HP sales representative or HP authorized ServiceOne partner for Care Pack information.

### **Proactive Care Services**

HP 3 year 4 hour 24x7 c7000 Enclosure Proactive Care Service	U3C33E
HP 3 year 6 hour Call To Repair 24x7 c7000 Enclosure Proactive Care Service	U3C36E
HP 3 year 4 hour 24x7 c7000 Enclosure with Insight Control Proactive Care Service	U3P10E
HP 3 year 6 hour Call To Repair 24x7 c7000 Enclosure with Insight Control Proactive	U3P13E
Caro Cornico	

### **HP Proactive Care Personalized Support - Environmental Option**

HP 3 year ISS ProactiveCare Personalized Support

Installation & Start-up Services	
HP Startup Blade System c-Class Infrastructure Service	UE602E
HP Enhanced Network Installation and Startup Service for HP BladeSystem	UE603E
HP Hardware Install c-Class Enclosure and Server Blade Service	UE494E
HP Installation during Non Standard Hours c7000 Enclosure & Blade Service	UG870E



U6W98E

### **Related Options**

**NOTE:** Additional HP Care Pack services can be found at: http://www.hp.com/go/cpc

### HP Flexible Care Pack Services for your Integrity BladeSystem Enclosure

**NOTE:** Some options, including Fibre Channel and InfiniBand switches for the HP c-Class BladeSystem, are not covered under the c7000 Platinum enclosure Care Packs and carry separate Care Packs. Care Pack service level support for these options should always be uplifted to match existing storage or server service level. Please view the option QuickSpecs or contact your HP sales representative or HP authorized ServiceOne partner for Care Pack information.


### **Mission Critical Services**

partner for additional flexible Care Pack information

Proactive 24 Service - Mission Critical proactive environment 24x7 4hr onsite HW support	HA111A3#6Q6
Critical Service - Mission Critical proactive environment 6-Hour Call-to-Repair onsite HW support	HA112A3#6Q6
Installation & Start-up Services	
HP BladeSystem c7000 Infrastructure Installation and Startup Service for Blade Hardware and Insight Control Software	HA114A1#57A
HP Enhanced Network Installation and Startup Service for HP BladeSystem	HA124A1#56H
<b>NOTE:</b> Please contact your HP sales representative or HP authorized ServiceONE	



### Storage

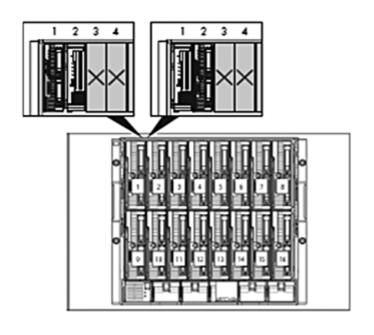

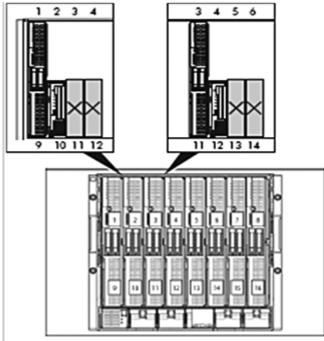


Figure 1 Installing a tape blade adjacent to a half-height server blade.

Figure 2

Installing a tape blade adjacent to a full-height server blade.

Installing Tape or Storage Blade				
Description	Quantity Supported	Position Supported		
Connecting a tape or storage blade to an adjacent half-height server blade (Figure 1)	Up to 8 per HP BladeSystem c- Class c7000 Enclosure	Odd or Even slots next to partner server blade		
Connecting a tape or storage blade to an adjacent full-height server blade (Figure 2)	Up to 4 per HP BladeSystem c- Class c7000 Enclosure	Slots 10, 12, 14, or 16 (lower bays only)		

#### **Comments**

- A tape or storage blade supports one partner server blade, and one partner server blade supports one tape or storage blade.
- Identify the partner server blade to be installed with the tape or storage. The two blades always occupy a pair of slots, as follows: 1 & 2, 3 & 4, 5 & 6, 7 & 8, 9 & 10, 11 & 12, 13 & 14, 15 & 16.
- If the partner server blade is installed in an odd-numbered bay, the tape or storage blade is installed in the adjacent evennumbered bay to the right.
- If the partner server blade is installed in an even-numbered bay, the tape or storage blade is installed in the adjacent oddnumbered bay to the left.
- A tape or storage blade supports one partner server blade, and one partner server blade supports one tape or storage blade.
- When partnering a tape or storage blade with a full height server blade, an HP PCI Express Mezzanine Pass-Thru Card for BladeSystem c-Class (431643-B21) is required. This card is installed in mezzanine 3 connector in the server blade.
- Identify the partner server blade to be installed with the tape or storage blade. The two blades always occupy a pair of slots, as follows: 9 & 10, 11 & 12, 13 & 14, 15 & 16.
- The partner server blade is installed in an odd-numbered bay.

### **HP BladeSystem c7000 Enclosure**

Storage

- The tape or storage blade is installed in the adjacent evennumbered bay to the right.
- The tape or storage blade is always located on the lower row of the enclosure in an even-numbered bay (slots 10, 12, 14 or 16)



### **Power Specifications**

HP 2400 Watts Platinum Hot Plug Power Supply					
Part Number	588603-B21				
Input Voltage Range (Vrms)	200-240				
Frequency Range (Nominal) (Hz)	50 / 60				
Nominal Input Voltage (Vrms)	200	208	220	230	240
Maximum Rated Output Wattage	2450	2450	2450	2450	2450
Nominal Input Current (A rms)	13.9	13.4	12.6	12.0	11.4
Maximum Rated Input Wattage Rating (Watts)	2692	2692	2678	2678	2663
Maximum Rated VA (Volt-Amp)	2778	2778	2762	2762	2747
Efficiency (%) at Max. Rated Output Wattage	91	91	91.5	91.5	92
Power Factor	0.98	0.98	0.98	0.98	0.98
Leakage Current (mA)	0.97	1.01	1.06	1.11	1.16
Maximum Inrush Current (A peak)	100	100	100	100	100
Maximum Inrush Current duration (mS)	10	10	10	10	10
Maximum British Thermal Unit Rating (BTU-Hr)	9186	9186	9136	9136	9086

HP 2650 Watts Platinum Hot Plug Pow	er Supply				
Part Number	733459-B21				
Input Voltage Range (Vrms)	200-240				
Frequency Range (Nominal) (Hz)	50 / 60				
Nominal Input Voltage (Vrms)	200	208	220	230	240
Maximum Rated Output Wattage	2650	2650	2650	2650	2650
Nominal Input Current (A rms)	14.5	13.9	13.1	12.5	12.0
Maximum Rated Input Wattage Rating (Watts)	2898	2901	2904	2887	2884
Maximum Rated VA (Volt-Amp)	2896	2888	2887	2882	2878
Efficiency (%) at Max. Rated Output Wattage	91.4	91.3	91.2	91.8	91.9
Power Factor		0.98			
Leakage Current (mA)	0.97	1.01	1.06	1.11	1.16
Maximum Inrush Current (A peak)	100				
Maximum Inrush Current duration (mS)	10				
Maximum British Thermal Unit Rating (BTU-Hr)	9888	9899	9910	9850	9840

### **NOTE:**


To review maximum system power ratings for facilities planning purposes use the HP Power Advisor which is available via the online tool located at URL: www.hp.com/go/HPPowerAdvisor



**Technical Specifications** 

### **Server Blade and Fan Population Guidelines**

### Fan bay numbering

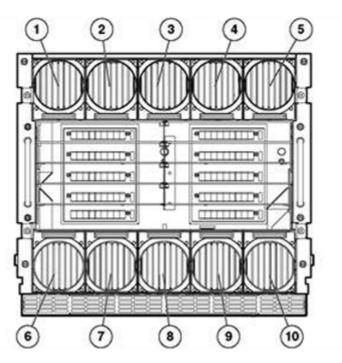


Fans must be placed in the following bays

Number of Fans	Fan Bays Used
4	4, 5, 9, 10
6	3, 4, 5, 8, 9, 10
8	1, 2, 4, 5, 6, 7, 9, 10
10	1, 2, 3, 4, 5, 6, 7, 8, 9, 10

**NOTE:** For correct operation fans and server blades must be installed in the correct bays. The BladeSystem Onboard Administrator will ensure that fans and blades are correctly placed before allowing systems to power on.

### **Technical Specifications**

### Half-height server blade bay numbering

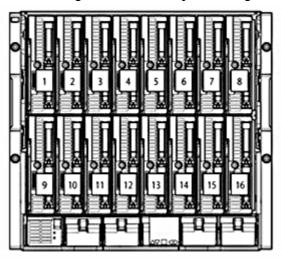


- 1. Device Bay 1
- 2. Device Bay 2
- 3. Device Bay 3
- 4. Device Bay 4
- 5. Device Bay 5
- 6. Device Bay 6
- 7. Device Bay 7
- 8. Device Bay 8

- 9. Device Bay 9
- 10. Device Bay 10
- 11. Device Bay 11
- 12. Device Bay 12
- 13. Device Bay 13
- 14. Device Bay 14
- 15. Device Bay 15
- 16. Device Bay 16

**NOTE:** Half-height servers should be populated from top and bottom from left to right from the front of the enclosure. So the first two half-height servers would be placed in bays 1 & 9 the second two half-height servers would be placed in bays 2 & 10 and so on until the enclosure is full.

### Full-height server blade bay numbering

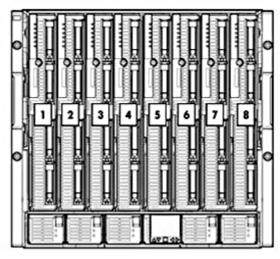

- 1. Device Bay 1
- 2. Device Bay 2
- 3. Device Bay 3

- 5. Device Bay 5
- 6. Device Bay 6
- 7. Device Bay 7




### **Technical Specifications**

4. Device Bay 4 8. Device Bay 8

**NOTE:** Full-height servers should be populated from left to right.

### Mixed Configuration - Full Height and Half-Height Population rules

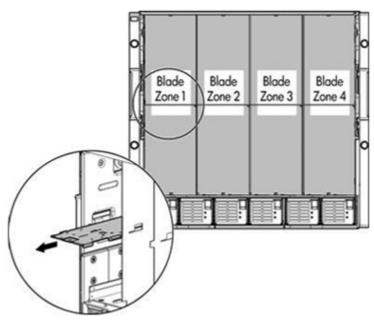

The c7000 enclosure is divided into 4 quadrants by the vertical support metalwork. Within each quadrant a removable divider is used to support half height devices. To install a full-height blade in any quadrant this divider must be removed. As a consequence a quadrant can only contain either full-height server blades or half-height server blades.

**NOTE:** Storage blades and Tape blades can be installed in the same quadrant as both full-height and half-height blades, a bracket ships with each D2200sb/Tape Blade that allows a half-height blade to be mounted on top of the storage blade.

**NOTE:** The lower tape or storage blade cannot be removed without first removing the upper half height blade.

HP BladeSystem	Dimensions	Height	17.4 in (442 mm)
c7000 Server Blade		Width	17.6 in (447.04 mm)
Enclosure		Depth	32 in (813 mm)
	<b>Shipping Dimensions</b>	Height	29.88 in (759 mm)
		Width	23.88 in (607 mm)
		Depth	39.88 in (1013 mm)
	Single Phase Enclosure	Unboxed	192 lb (87 kg)
	Weight	Shipping	235 lb (106.6 kg)
	Three -Phase Enclosure	Unboxed	222 lb (100.7 kg)
	Weight	Shipping	265 lb (120.2 kg)
	DC Input Enclosure	Unboxed	151 lb (68.5 kg)
	Weight	Shipping	194 lb (88 kg)
	Max Enclosure Weight	Unboxed	450 lb (204 kg)
	(approximate)	Shipping	493 lb (223.6 kg)



### **Technical Specifications**

**Temperature Range** Operating 50° to 95° F (10° to 35° C)

Non-Operating -22° to 140° F (-30° to 60° C)

**Relative Humidity** Operating 10 to 90% relative humidity (Rh), 28°C (82.4°F)

maximum wet bulb temperature, non-

condensing.

Non-Operating 5 to 95% relative humidity (Rh), 38.7°C

(101.7°F)maximum wet bulb temperature, non-

condensing.

**NOTE:** Operating temperature has an altitude derating of  $1.8^{\circ}$  F ( $1^{\circ}$  C) per 1,000 ft (304.8 m). No direct sunlight. Upper operating limit is 10,000 ft (3,048 m) or 70Kpa/10.1 psia. Upper non-operating limit is 30,000 ft (9,144 m) or 30.3 KPa/4.4 psia. Storage maximum humidity of 95% is based on a maximum temperature of  $113^{\circ}$  F ( $45^{\circ}$  C). Altitude maximum for storage is 70 KPa.

•		
2400W PSU	•	200 to 240 VAC
	Rated input current per power supply	13.9 A at 200 VAC 13.3 A at 208 VAC 12.6 A at 220 VAC
	Rated input power per power supply	2780 VA
Rated input voltage	200 to 208 VAC Line to Line 3-Phase Delta	•
Rated input frequency	50 to 60 Hz	
2250W PSU	Max input current per line cord	22.6A at 200 VAC 21.8A at 208 VAC
	Max input power per line cord	7836VA Max
2400W PSU	Max input current per line cord	24A at 200 VAC 23.1A at 208 VAC
	Max input power per line cord	8340 VA Max
Rated Input Voltage	36 to -72 VDC	
Max Input Current per line cord	75A	
Max Input Power per line Cord	2700W	
Single Phase	IEC-320 C19-C20 1.22m (6	ft)
3-Phase	2 x NEMA L15-30p 3.048m	(10 ft)
-48V DC Power	Terminal lug: 45DG 4AWG 1	/4 2H
	Two-hole lug 45 degree bend 0.25in. (6.4mm) stud hole s 0.63in. (16mm) hole spacin	_
	Rated input frequency 2250W PSU  2400W PSU  Rated Input Voltage Max Input Current per line cord Max Input Power per line Cord Single Phase 3-Phase	Rated input voltage Rated input current per power supply  Rated input power per power supply  Rated input voltage  200 to 208 VAC Line to Line 3-Phase Delta  Rated input frequency 250 to 60 Hz  2250W PSU  Max input current per line cord  Max input power per line cord  Max input current per line cord  Max input power per line cord  Single Phase 36 to -72 VDC  75A  75A  2700W  Cord  Single Phase 1EC-320 C19-C20 1.22m (6 3-Phase 2 x NEMA L15-30p 3.048m  Terminal lug: 45DG 4AWG 1  Two-hole lug 45 degree bend 0.25in. (6.4mm) stud hole s



### **Technical Specifications**

OutputHP 2400W High Efficiency200 - 240 VAC 2400 W 92% EfficiencySpecificationsHot-Plug Power Supply

(per power supply) HP 2250W -48V DC Hot-

Plug Power Supply

Acoustic Noise Listed are the declared A-Weighted sound power levels (LWAd) and declared

2250W

average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance

with ISO 9296 (ECMA 109).

Idle

LWAd 7.1 Bels LpAm 54 dBA

Operating

LWAd 7.2 Bels LpAm 54 dBA

Option KitsPower Supply OptionHeight8.75 in (223 mm)

 Shipping Dimensions
 Width
 8.63 in (219 mm)

 Depth
 35.13 in (892 mm)

 Weight
 8.5 lbs (3.85 kg)

 Weight
 8.5 lbs (3.85 kg)

 Fan Option Shipping
 Height
 8.75 in (223 mm)

 Dimensions
 Width
 9.75 in (248 mm)

 Depth
 15.88 in (403 mm)

Weight 4.0 lbs (1.8 kg)

BladeSystem Onboard Height 2.50 in (63.5 mm)

Administrator Option Width 9.88 in (251 mm)

Shipping Dimensions Depth 13.50 in (343 mm)

Weight

Environmental-friendly Products and Approach

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a>. To recycle your product, please go to: <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

4.0 lbs (1.8 kg)

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

### **Technical Specifications**

© Copyright 2013 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation.

Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

AMD Opteron™ is a US registered trademark of AMD Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

